




CP12 SERIES - 3 PHASE SUBMERSIBLE PUMP CURVES

40HP MOTOR
13° or 17° Impeller

50HP MOTOR
17°, 20° or 22.5° Impeller

60HP MOTOR
17°, 20° or 22.5° Impeller

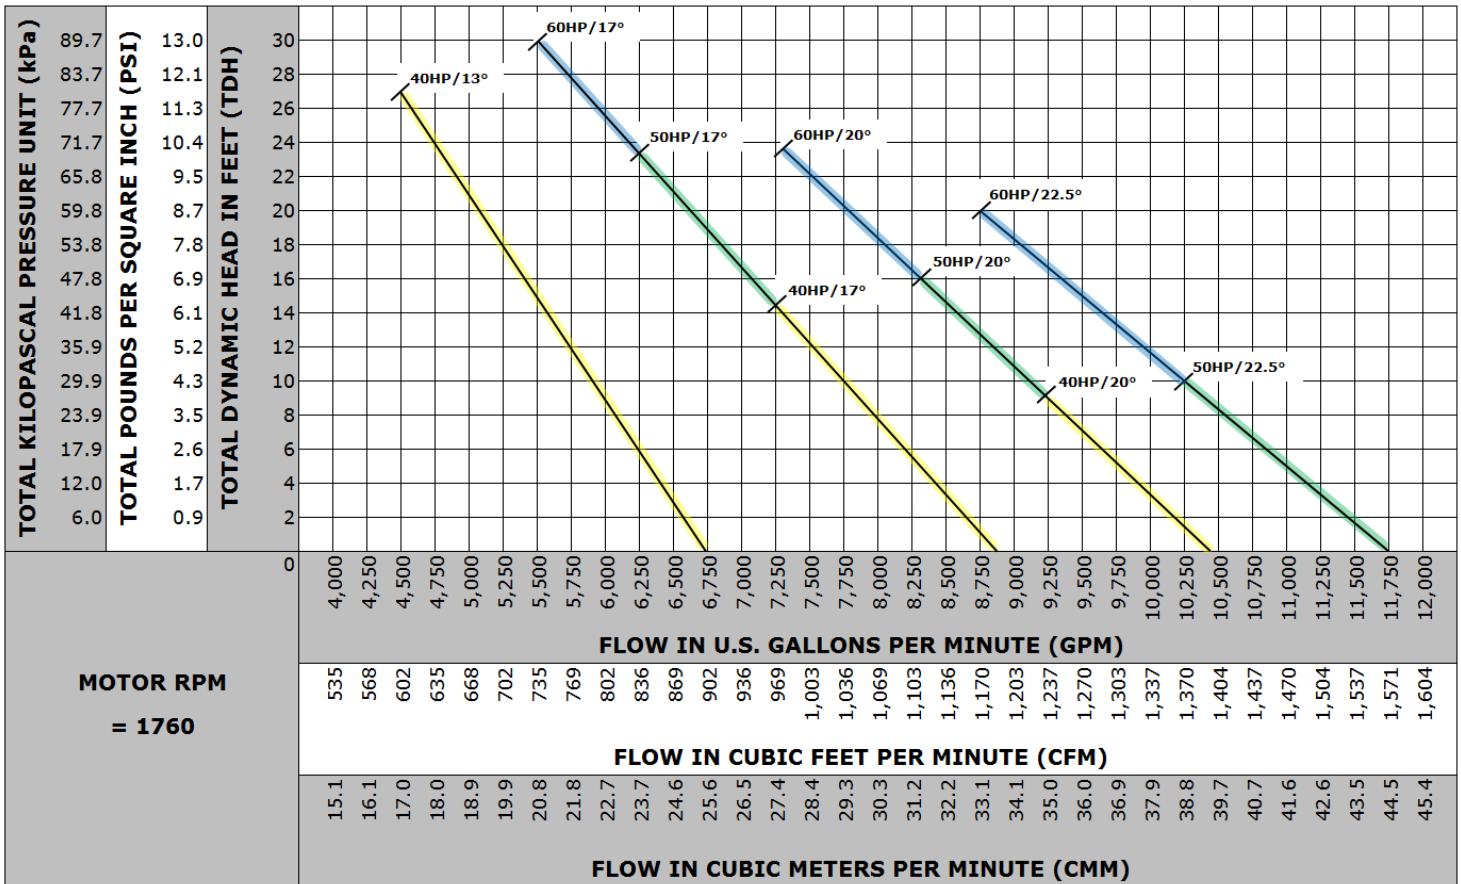

PLOT YOUR POINT: Follow the flow in U.S. gallons per minute required horizontally on the chart to your GPM OR CFM required; then follow up to your TDH OR PSI required.

The location of the point plotted on the chart determines the horsepower of pump and degree of impeller required.