




# CP10 SERIES AXIAL-FLOW PUMP EFFICIENCY CURVES

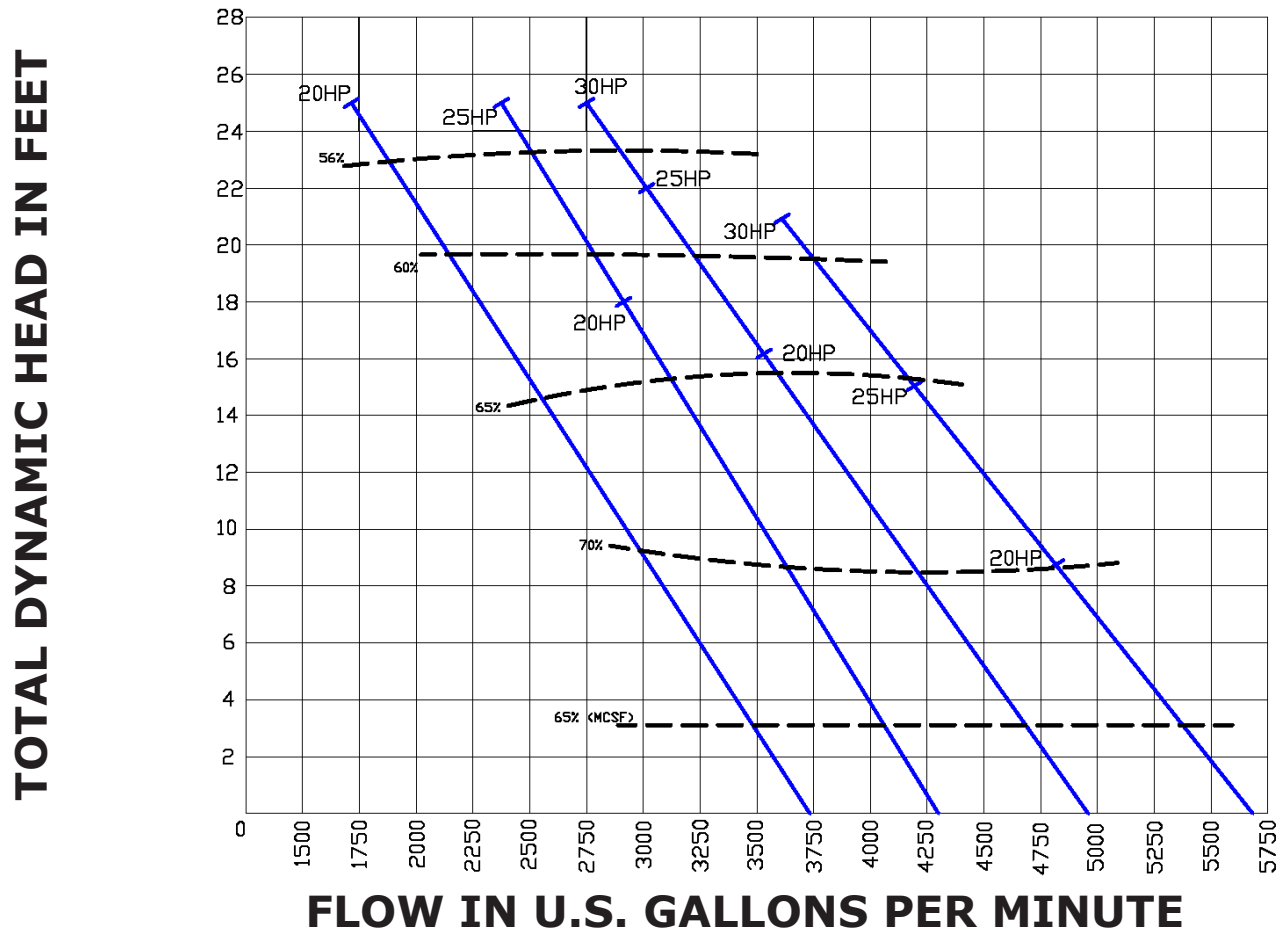

- Efficiency curves shown are based on:
  - 1760 Motor RPM
  - 60Hz Full Load Amps
- 30 Hz Minimum - 60 Hz Maximum
- Elbow head loss must be deducted.
- PLEASE NOTE: Modified performance curves will need to be considered when using pump with a Variable Frequency Drive (VFD).
- MCSF: Minimum Continuous Stable Flow
- ASME Y14.5-2018 Applies

### PROPRIETARY AND CONFIDENTIAL

The information contained in this drawing is the sole property of Carry Pumps. Any reproduction in part or as a whole without the written permission of Carry Pumps is prohibited.

Carry Pumps, Inc. • 1360 Prospect Ave. • Caro, MI 48723  
[www.carrypumps.com](http://www.carrypumps.com) • (800) 492-2779 • [sales@carrypumps.com](mailto:sales@carrypumps.com)