


CP06 SERIES AXIAL-FLOW PUMP PERFORMANCE CURVES

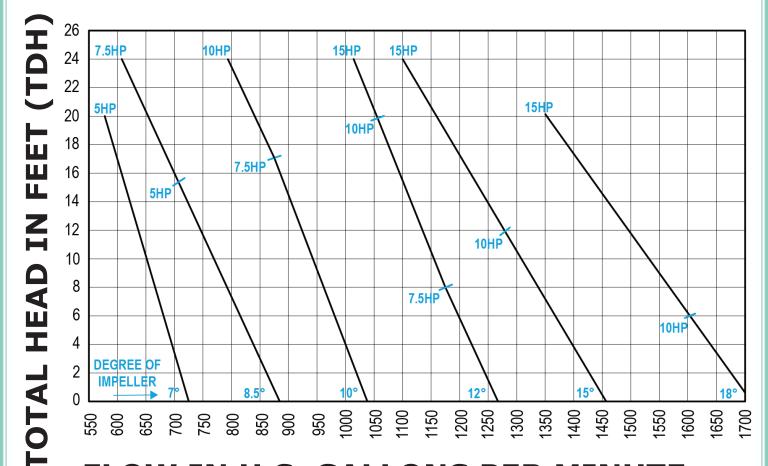

FLOW IN U.S. GALLONS PER MINUTE

8" Discharge/Pipe recommended for best performance.

PLOT YOUR POINT

Follow the flow in U.S. Gallons Per Minute (GPM) required horizontally on the chart to your GPM flow rate required; then follow the chart up to your total head in feet required.

The location of the point plotted on the chart determines the pump horsepower and impeller degree required.

Carry Pumps, Inc. • 1360 Prospect Ave. • Caro, MI 48723 www.carrypumps.com • (800) 492-2779 • sales@carrypumps.com